



Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com

Built for Precision, Powered by Innovation

The new Explorer (EXR series) offers an intuitive interface, outstanding weighing performance, and an environmentally friendly design. The new generation Explorer establishes a groundbreaking standard for laboratory operations.

Unique Features:

- High Performance Weighing**

Achieve consistent results with built-in automatic calibration, touchless sensors and a ventilated weighing pan. Get reliable data with the digital high-speed load cell.

- Refined User Experience**

An intuitive 7-inch glass touchscreen, digital leveling, and simplified data management is easy to use. With an effortless installation and chemical-protective design it ensures efficiency and comfort.

- Effective Communication Options**

Supports HID connection to PC or keyboard without drivers, and provides 2-way communication with RS232, USB, Ethernet, Bluetooth, and WiFi for seamless data transfer.

EXPLORER™ Semi-Micro Balances

Specifications




Model	EXR125D	EXR125	EXR225D	EXR225
Capacity	82 g / 120 g	120 g	120 g / 220 g	220 g
Readability d, Fine Range	0.01 mg	0.01 mg	0.01 mg	0.01 mg
Readability d, Full Range	0.1 mg	0.01 mg	0.1 mg	0.01 mg
Repeatability (sd.), ≤5% of Full Load Typical	0.01 mg	0.01 mg	0.01 mg	0.01 mg
Repeatability (sd.), 5% of Full Load to Fine Range Max	0.02 mg	0.02 mg	0.02 mg	0.02 mg
Repeatability (sd.), Fine Range Max to Full Range	0.1 mg	0.02 mg	0.1 mg	0.1 mg
Linearity Deviation Typical	0.06 mg	0.06 mg	0.06 mg	0.06 mg
Linearity Deviation	0.2 mg	0.1 mg	0.2 mg	0.1 mg
Span Calibration Points	25g, 50g, 75g, 100g		50g, 100g, 150g, 200g	
Weighing Units		g, mg, ct, N, oz, ozt, Grain, dwt, mo, msg, tcl, tola, baht, Custom 1, Custom 2		
Applications		Basic Weighing, Parts Counting, Check Counting, Percent Weighing, Check Weighing, Dynamic Weighing, Totalization, Formulation, Differential, Density Determination, Peak Hold		
Stabilization Time (typical)		0.1 mg: ≤2 seconds, 0.01 mg: ≤ 5 seconds		
Sensitivity Temperature Drift (ppm/°C)		0.8		
Min-Weight (typical) (K=2, U=1%)		2 mg		
Min-Weight (typical) (USP, K=2, U=0.10%)		20 mg		
Min-Weight (optimal) (USP, K=2, U=0.10%, SRP≤0.41d)		8.2 mg		
Terminal Display		7-inch TFT 16.7M Color Touch Screen with Glass Overlay, Detachable Terminal		
Display Resolution		800 x 480 Pixels		
Communication		USB Host (Type A) x 2, USB Device (Type C) x 1 Ethernet (RJ45) x 1, RS232 x 1; Optional Wi-Fi, Bluetooth Dongle		
Leveling System		2 Leveling Feet with Digital Leveling Bubble		
Power Supply		AC Adapter Input: 100-240 VAC 0.5A 50-60 Hz AC Adapter Output: 12 VDC 1.5A		
Weighing Pan Size		Aero Pan 80mm x 80mm		
Touchless Sensor		2 Touchless Sensors on the terminal		
Draftshield with anti-static coating		Standard		
Terminal Status Lights		Standard, 7-color Selectable		
Assembled Dimensions (W x D x H)		230mm x 393mm x 370mm		
Shipping Dimensions (W x D x H)		415mm x 630mm x 561mm		
Net Weight		7.4 kg		
Shipping Weight		10.2 kg		

Distributed by:
 Safety Emporium
 PO Box 1003
 Blackwood, NJ 08012
 Ph: (866) 326-5412 toll-free
 Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com

EXPLORER™ Semi-Micro Balances

Outline Dimensions

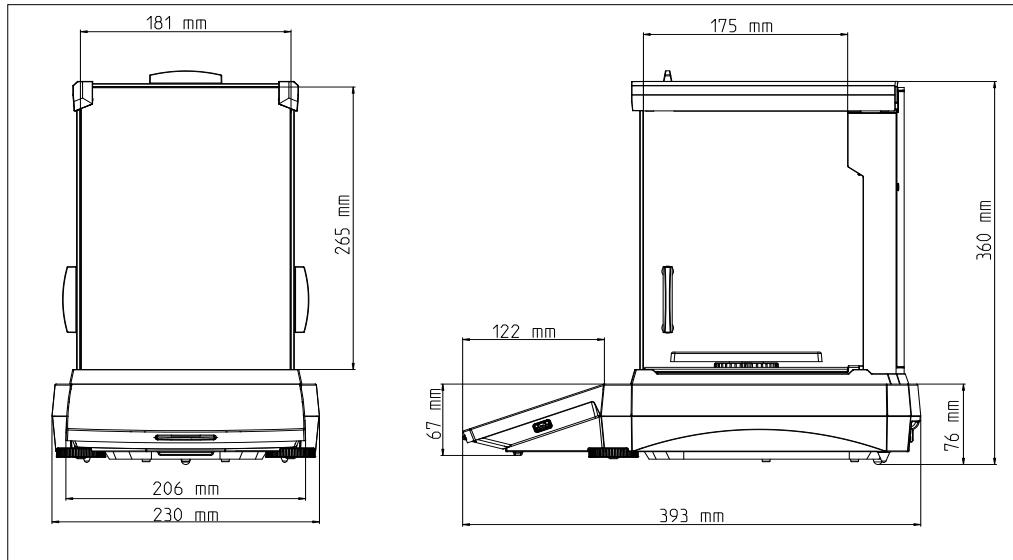

Approvals

- **Product Safety:** IEC/EN 61010-1; CAN/CSA C22.2 61010-1; UL 61010-1
- **Electromagnetic Compatibility:** IEC/EN 61326-1 Class B, Basic Environments; FCC Part 15 Class A; Canada ICES-003 Class A

Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com

EXPLORER™ Semi-Micro Balances

Accessories

	Item No.	30944360
	Accessory Name	Bluetooth Printer, Impact, SF40A/BT

	Item No.	30064203
	Accessory Name	Printer, Impact, SF40A

	Item No.	31059239
	Accessory Name	BT dongle and Wi-Fi dongle LM842

	Item No.	30130302
	Accessory Name	Static Ionizer, ION-100A

	Item No.	31059237
	Accessory Name	Weighing Kit

	Item No.	80253384
	Accessory Name	Density Kit, Solids

	Item No.	83034024
	Accessory Name	Sinker, Glass, Liquid, Density Kit

	Item No.	12120799
	Accessory Name	SF40A Paper roll (57,5mm 2pcs)

	Item No.	30529322
	Accessory Name	SF40A Ink Ribbon Cassette

Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com

OHAUS CORPORATION
Tel: 800.672.7722
973.377.9000
Fax: 973.944.7177
www.ohaus.com

The management system
governing the manufacture
of this product is
ISO 9001:2015 certified.

